
Crown Products Database

All Articles in All Categories

Contents

Commercial	1
MODEL □□□	
No. 3210-BD Conical Bellmouth with Damper and Therma Seal Gasket	1
MODEL No. 1028, 1026, 1024 Flat S-Lock	1
MODEL No. 1126, 1124 Standing S-Lock	2
MODEL No. 1228, 1226, 1224 Flat Drive	2
MODEL No. 1324, 1322, 1320 1" Standing Bar-Lock	3
MODEL No. 1424, 1422, 1420 1½" Standing Bar-Lock	3
MODEL No. 1524, 1522, 1520 2" Standing Bar-Lock	4
MODEL No. 1624, 1622, 1620 Standing Drive	4
MODEL No. 3200 Conical Spin-In	4
MODEL No. 3200-D Conical Spin-In w/ Damper	5
MODEL No. 3200-DS Conical Spin-In with□□□ Damper and Standoff	5
MODEL No. 3210 Conical Takeoff with□□□ Therma Seal Gasket	6
MODEL No. 3210-B Conical Bellmouth with□□□ Therma Seal Gasket	7
MODEL No. 3210-BDS Conical Bellmouth with□□□ Damper, Standoff & Therma Seal □□□ Gasket	7
MODEL No. 3210-D Conical Takeoff w/ Damper□□□ and Therma Seal Gasket	8
MODEL No. 3210-DS Conical Takeoff w/ Damper,□□□ Standoff and Therma Seal Gasket□□□ □□□	9
MODEL No. 3211 Conical Takeoff w/ Insulation□□□ Guard & Gasket	9
MODEL No. 3211-D Conical Takeoff w/ Damper,□□□ Insulation Guard & Gasket	10
MODEL No. 3211-DS Conical Takeoff w/ Damper,□□□ Standoff, Insulation Guard & Gasket	10
MODEL No. 3300 45° Takeoff w/ Gasket Flange	11
MODEL No. 3300-D 45° Takeoff w/ Gasket Flange & Damper	11
MODEL No. 3300-DS 45° Takeoff w/ Gasket Flange, Damper & Standoff	12
MODEL No. 3400 Center Takeoff w/ Gasket Flange	12
MODEL No. 3400-D Center Takeoff w/ Gasket □□□ Flange & Damper	13
MODEL No. 3400-DS Center Takeoff w/ Gasket □□□ Flange, Damper & Standoff□□□	14
MODEL No. 3710 Straight Takeoff with Gasket	14
MODEL No. 3710-D Straight Takeoff with Damper□□□ & Gasket	15
MODEL No. 3710-DS Straight Takeoff with □□□ Damper, Standoff & Gasket	15
MODEL No. 3720 Straight Spin-In Collar	16
MODEL No. 3720-D Straight Spin-In Collar□□□ with Damper	16
MODEL No. 3720-DS Straight Spin-In Collar□□□ with Damper & Standoff	17

MODEL No. 3730 Tab Lock Collar	17
MODEL No. 3730-D Tab Lock Collar with Damper	18
MODEL No. 3730-DS Tab Lock Collar□□□ with Damper & Standoff	18
MODEL No. 401 □ Rectangular Duct	19
MODEL No. 406□ Starting Collar	19
MODEL No. 408□ Boot Tap	20
MODEL No. 411□□ End Cap	21
MODEL No. 412 Flex Connector	21
MODEL No. 416 Reducer / Increaser	22
MODEL No. 420 Transition	22
MODEL No. 422 Manual Damper	23
MODEL No. 430 90° Long Way Elbow	23
MODEL No. 435 45° Long Way Elbow	24
MODEL No. 440 90° Short Way Elbow	24
MODEL No. 445 45° Short Way Elbow□□□	25
MODEL No. 490 4" Turning Vane	25
MODEL No. 492 4" Push-On Rail	26
MODEL No. 496 2" Turning Vane	26
MODEL No. 498 2" Push-On Rail□□□	27
MODEL No. 801 Rectangular Duct□□□	27
MODEL No. 806 Starting Collar	27
MODEL No. 808 Boot Tap	28
MODEL No. 811 End Cap	28
MODEL No. 812 Flex Connector	29
MODEL No. 816 Reducer / Increaser	29
MODEL No. 820 Transition	30
MODEL No. 830 90° Long Way Elbow	30
MODEL No. 835 45° Long Way Elbow	31
MODEL No. 840 90° Short Way Elbow	31
MODEL No. 845 45° Short Way Elbow	32
MODEL No. SP6101 Spiral Pipe	33
MODEL No. SP6111 90° Elbow□□□	33
MODEL No. SP6121 45° Elbow	34
MODEL No. SP6265 Reducer	34
MODEL No. SP6271 90° Tee	35
MODEL No. SP6271R Reducing 90° Tee	35
MODEL No. SP6273 End Cap	36
MODEL No. SP6276 45° Lateral	36
MODEL No. SP6276R Reducing 45° Lateral	37
MODEL No. SP6307 Saddle Tap□□□	37
MODEL No. SP6680 Coupling	38
Rectangular Duct Work & Fittings	38
Transverse Connectors & Turning Vanes	38
Bolt-Together Rectangular Duct Work & Fittings (TDF)	38
Spiral Pipe & Fittings	39
Commercial Takeoff Fittings	39

Residential	39
MODEL No. 101□	
Galvanized Snaplock Pipe	39
MODEL No. 105 □	
ALUMINUM FLEXIBLE PIPE	40
MODEL No. 111□	
Adjustable 90 Degree Elbow	40
MODEL No. 121□	
Adjustable 45 Degree Angle	41
MODEL No. 1242 Framed Boot	41
MODEL No. 1242-FL Framed Boot	42
MODEL No. 1243-FL Angle Floor Boot	42
MODEL No. 1244-FL Center End Floor Boot	43
MODEL No. 1250 Mounting Bracket, 24 Gauge	43
MODEL No. 1250-16 Mounting Bracket, 24 Gauge 16" long	44
MODEL No. 1252 Mounting Bracket, 25" Long	44
MODEL No. 1254 Mounting Bracket, 25" Long	45
Model No. 1260 Mounting Angle	45
MODEL No. 1269 Framed Box w/ Side Collar	46
MODEL No. 1269-FL Framed Box □□□	
w/ Side Collar	46
MODEL No. 1275 Framed Box w/ Top Collar	47
MODEL No. 1284 Duct Board Box w/o Flange	47
MODEL No. 1288 Duct Board Box w/ Flange	48
MODEL No. 1288-FL Duct Board Box □□□	
with Flange	48
MODEL No. 1288-FLG Duct Board Box □□□	
w/ Flange and Therma Seal Gasket	49
MODEL No. 1292 Duct Board Box w/ Flange□□□	
11" Tall	49
MODEL No. 1292-FL Duct Board Box□□□	
w/ Flange, 11" Tall	50
MODEL No. 1298 Slant Top Duct Board Box □□	
with Flange	50
MODEL No. 1298-FL Slant Top Duct Board □□□	
Box with Flange	51
MODEL No. 1480 Rectangle-to-Round Transition, R-4 Insulation	52
MODEL No. 1480-FL Rectangle-to-Round Transition, R-6 Insulation	52
MODEL No. 1565-CRD Ceiling Radiation□□□	
Damper Box, Side Collar	53
MODEL No. 1575 Framed Box, Silver Interior	53
MODEL No. 1575-CRD Ceiling Radiation□□□	
Damper Box, Top Collar	54
MODEL No. 1575-G Framed Box w/ Therma□□□	
Seal Gasket, Silver Interior	54
MODEL No. 1580 Framed Box, Black Interior	55
MODEL No. 1580-G Framed Box w/ Therma□□□	
Seal Gasket, Black Interior	55
MODEL No. 1713 Trunk Line Reducer Box□□□	
1" Duct Board	56
MODEL No. 1713-FL Trunk Line Reducer Box□□ 1½" Duct Board	56
MODEL No. 1715 Triangle Box□□□	
1" Duct Board	57
MODEL No. 1715-FL Triangle Box□	
1-1/2" Duct Board	57
MODEL No. 175-X□	
Round Damper Sleeve with Damper Handle Standoff	58
MODEL No. 2001 Slot Diffuser Plenum	58

MODEL No. 201 Wallstack Duct	59
MODEL No. 223 Stackhead	59
MODEL No. 230□	
Long Way Elbow, 90 Degree	60
MODEL No. 231□	
Straight Boot	60
MODEL No. 232□	
Range Hood Transition	61
MODEL No. 233 90° Angle Boot	61
MODEL No. 234□	
Center End Boot	62
MODEL No. 235□	
Long Way Elbow, 45 Degree	62
MODEL No. 236□	
Adjustable Offset Boot	63
MODEL No. 240□	
Short Way Elbow, 90 Degree	63
MODEL No. 241 Straight Boot□□□	
.	64
MODEL No. 242 Framed Boot	64
MODEL No. 243 90° Angle Boot	64
MODEL No. 243-F 90° Angle Boot with□□□	
Drywall Flange	65
MODEL No. 244 Center End Boot	65
MODEL No. 244-F Center End Boot with□□□	
Drywall Flange	66
MODEL No. 245□	
Short Way Elbow, 45 Degree	66
MODEL No. 246□	
Adjustable Boot	67
MODEL No. 261 Tab Collar-3" Long	67
MODEL No. 261-L Tab Collar - 6" Long	68
MODEL No. 265□	
REDUCER / INCREASER	68
MODEL No. 265 Tapered Reducer	69
MODEL No. 266□	
FLAT REDUCER	69
MODEL No. 269 Register Box	70
MODEL No. 273□	
End Cap	70
MODEL No. 275□	
Damper	71
MODEL No. 276□	
IN-LINE WYE	71
MODEL No. 277□	
BULL NOSE WYE	72
MODEL No. 278□	
ADJUSTABLE WYE	72
MODEL No. 279□	
ADJUSTABLE WYE 2-WAY	73
MODEL No. 301 □	
Plenum	73
MODEL No. 305□	
TAKEOFF from ROUND PIPE	74
MODEL No. 306□	
ADJUSTABLE TAKEOFF	75
MODEL No. 307□	
SADDLE TAKEOFF	75

MODEL No. 308	76
TOP TAKEOFF	76
MODEL No. 309	76
SIDE TAKEOFF	77
MODEL No. 310 Saddle Collar with Therma Seal Gasket	77
MODEL No. 312 Saddle Collar with Scoop, Therma Seal Gasket	77
MODEL No. 314	78
Saddle Collar with Damper, Therma Seal Gasket	78
MODEL No. 316 Saddle Collar with Scoop Damper, Therma Seal Gasket	79
MODEL No. 332 Vent Top w/ Wind Band	79
MODEL No. 334 Vent Top	80
MODEL No. 336 Roof Flashing	80
MODEL No. 339 Storm Collar	81
MODEL No. 341 Roof Jack for Flat Roof	81
MODEL No. 341-P Roof Jack for Pitched Roof	82
MODEL No. 349 Sidewall Vent	82
MODEL No. 350 Roof Cap with Round Collar	83
MODEL No. 350-D Roof Cap with Round Collar & Gravity Damper	83
MODEL No. 350-R	83
Roof Cap with Rectangular Hole	84
MODEL No. 350-RD	84
Roof Cap with Rectangular Hole & Damper	84
MODEL No. 353	84
Roof Jack for Refrigerant Lines	84
MODEL No. 357	84
Blind Box, 12" High	85
MODEL No. 360	85
Aluminum Ventilator with Screen	85
MODEL No. 360-D Aluminum Roof Ventilator with Damper	86
MODEL No. 360-DX Aluminum Ventilator with Extension & Damper	86
MODEL No. 360-X Aluminum Ventilator with Extension	87
MODEL No. 412-R Flex Connector for Round Duct	87
MODEL No. 450 Universal Access Door	88
MODEL No. 465 Expand-O-Duct, 12x12	88
MODEL No. 469 Expand-O-Dut, 16x16	89
MODEL No. 480 Rectangle-to-Round Transition	89
MODEL No. 612 Can Stock	90
MODEL No. 616 Tab Collar	90
MODEL No. 616-D Tab Collar w/ Damper	91
MODEL No. 616-DS Tab Collar w/ Scoop and Damper	91
MODEL No. 616-G Tab Collar w/ Therma Seal Gasket	92
MODEL No. 619 Inside Ring	92
MODEL No. 620 Twist Lock Collar for 1" Duct Board	93
MODEL No. 620-FL Twist Lock Collar for 1½" Duct Board	93
MODEL No. 622 Twist Lock Collar with Scoop for 1" Duct Board	94
MODEL No. 622-FL Twist Lock Collar with Scoop for 1½" Duct Board	94
MODEL No. 624 Twist Lock Collar with Damper for 1" Duct Board	95
MODEL No. 624-FL Twist Lock Collar with Damper for 1-1/2" Duct Board	95
MODEL No. 626 Twist Lock Collar w/ Scoop & Damper for 1" Duct Board	96
MODEL No. 626-FL Twist Lock Collar with Scoop & Damper for 1½" Duct Board	96

MODEL No. 640 Ring Seal Collar	97
For 1" Duct Board	
MODEL No. 640-FL Ring Seal Collar	97
For 1½" Duct Board	
MODEL No. 644 Ring Seal Collar with Damper	98
For 1" Duct Board	
MODEL No. 644-FL Ring Seal Collar with Damper	98
For 1½" Duct Board	
MODEL No. 650 Ring Seal Collar For Sheet Metal Duct	99
MODEL No. 652 Ring Seal Collar w/ Scoop For Sheet Metal Duct	100
MODEL No. 654 Ring Seal Collar w/ Damper For Sheet Metal Duct	100
MODEL No. 656 Ring Seal Collar with Scoop & Damper for Sheet Metal Duct	101
MODEL No. 666 Adapter	101
MODEL No. 680 Flex Duct Connector Sleeve	102
MODEL No. 695 Saddle Hanger for Duct Board	102
MODEL No. 697 Duct Board Hanger Channel	103
MODEL No. 700-350 Dryerbox for 2x4 wall	103
MODEL No. 700-425 Dryerbox for 2x6 wall	104
MODEL No. 710 Takeoff Collar For Sheet Metal Duct	104
MODEL No. 712 Takeoff Collar w/ Scoop For Sheet Metal Duct	105
MODEL No. 714 Takeoff Collar w/ Damper For Sheet Metal Duct	105
MODEL No. 716 Collar with Scoop & Damper, Therma Seal Gasket	106
MODEL No. 720 Spin-In Collar For Sheet Metal Duct	106
MODEL No. 722 Spin-In Collar w/ Scoop For Sheet Metal Duct	107
MODEL No. 724 Spin-In Collar w/ Damper For Sheet Metal Duct	107
MODEL No. 726 Spin-In Collar w/ Scoop & Damper For Sheet Metal Duct	108
MODEL No. 750 Drain Pan	108
MODEL No. 777 Aluminum Hanger Strap, 1"x200' Roll	109
MODEL No. 778 Aluminum Hanger Strap, 1"x 100' Roll	109
MODEL No. 792 Tying Wire	109
MODEL No. 793 Angle	110
MODEL No. 795 1" & 2" Duct Hanger Strap, 10' Strip	110
MODEL No. 797 2" Duct Hanger Strap, 100' Roll	111
MODEL No. 799 2" Duct Hanger Strap, 100' Roll	111
MODEL No. 88 Duct Board Box w/o Flange	112
MODEL No. 900 Return Air Box, 6" Deep	112
MODEL No. 905 Return Air Box, 10" Deep	113
MODEL No. 910 Return Air Box, 22" Deep	113
MODEL No. 912 Return Air Box, 22" Deep	114
MODEL No. 920 Supply Connector	114
MODEL No. 925 Supply Bushing	115
MODEL No. 930 Damper Section, Top Only	115
MODEL No. 935 Damper Section	115
MODEL No. 945 Disposable Filter	116
MODEL No. 950 Floor Grille	116
MODEL No. 965 Wye	117

MODEL No. 967 Wye with Back Draft Damper	117
MODEL No.175 Round Damper Sleeve	118
MODEL No.271 Tee	118
MODEL No.356 Aluminum Vent Cap with Screen	119
MODEL No.370 Aluminum Flashing	119
MODEL No.500 Adjustable Return Air Stand with Filter Rack	120
MODEL No.550 Condensing Unit Cover	120
MODEL No.560 Line Cover	121
MODEL No.565 Line Cover with Cap	121
No. 261-D Tab Collar w/ Damper For □□□ Sheet Metal Duct□□□	122
Snaplock Pipe & Elbows	122
Aluminum Flexible Pipe	123
Tees, Wyes & Reducers	123
Takeoffs	123
Starting Collars for 1" & 1-1/2" Duct Board	123
Flex Duct Air Distribution Fittings	123
Starting Collars for Sheet Metal Duct	124
Register Boots and Boxes	124
Insulated Register Boots & Boxes, R-4	124
Ceiling Radiation Damper Boxes	124
Vent Tops & Flashing	124
Installation Accessories	124
Duct Hangers & Mounting Brackets	125
Mobile Home Duct & Fittings	125
Wallstack & Fittings	125
Insulated Register Boots & Boxes, R-6	125

There are no articles in this category.

Commercial

MODEL

No. 3210-BD Conical Bellmouth with Damper and Therma Seal Gasket



No. 3210-BD Conical Bellmouth w/ Damper and Therma

Seal Gasket - fabricated with a one piece spun aluminum

base and galvanized steel collar. Continuous welded

longitudinal seams. $\frac{3}{4}$ " wide gasket flange with pre-drilled

screw holes for easy installation. Available diameters: 6", 8",


10" & 12". Manual damper with locking handle.

MODEL No. 1028, 1026, 1024 Flat S-Lock




No. 1028, 1026, 1024 Flat S-Lock - fabricated from
galvanized steel and supplied in 5 ft. and 10 ft. sections.

MODEL No. 1126, 1124 Standing S-Lock

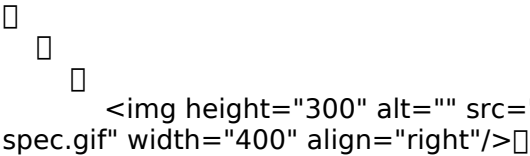
No. 1126, 1124 Standing S-Lock - fabricated from
galvanized steel and supplied in 5 ft. and 10 ft. sections.

MODEL No. 1228, 1226, 1224 Flat Drive

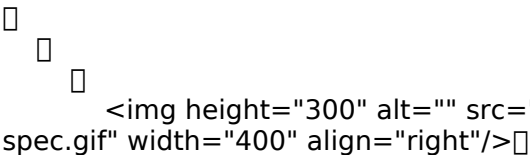
No. 1228, 1226, 1224 Flat Drive - fabricated from
galvanized steel and supplied in 5 ft. and 10 ft. sections.

□
□
□

MODEL No. 1324, 1322, 1320 1" Standing Bar-Lock

□
□
□
□ □
□

□
□
□
□ No. 1324, 1322, 1320 1" Standing Bar-Lock - □

□
□
□ fabricated from galvanized steel and supplied □

□
□ in 5 ft. and 10 ft. sections.□

□
□
□

MODEL No. 1424, 1422, 1420 1½" Standing Bar-Lock

□
□
□
□ □
□

□
□
□
□ No. 1424, 1422, 1420 1½" Standing Bar-Lock - □

□
□
□ fabricated from galvanized steel and supplied□

□
□ in 5 ft. and 10 ft. sections.□

 ``

No. 3200 Conical Spin-In - fabricated from galvanized steel in diameters 4" - 20". Continuous welded longitudinal seam. Conical opening 2" larger than collar diameter.

MODEL No. 3200-D Conical Spin-In w/ Damper

 ``

No. 3200-D Conical Spin-In w/ Damper - fabricated from galvanized steel in diameters 4" - 20". Continuous welded longitudinal seam. Conical opening 2" larger than collar diameter. Manual damper with locking handle.

MODEL No. 3200-DS Conical Spin-In with Damper and Standoff



No. 3200-DS Conical Spin-In w/ Damper & Standoff -
fabricated from galvanized steel in diameters 4" - 20".
Continuous welded longitudinal seam. Conical opening 2"
larger than collar diameter. Manual damper with 1½" damper
handle standoff.

MODEL No. 3210 Conical Takeoff with Therma Seal Gasket



No. 3210 Conical Takeoff w/ Therma Seal Gasket -
fabricated from galvanized steel in diameters 4" - 20".
Continuous welded longitudinal seam. 1" gasket flange
with pre-punched screw holes for easy installation.

aluminum base and galvanized steel collar. Continuous
welded longitudinal seams. ¾" wide gasket flange with
pre-drilled screw holes for easy installation. Available
diameters: 6", 8", 10" & 12". Manual damper with locking
handle and 1½" standoff.


**MODEL No. 3210-D Conical Takeoff w/ Damper
and Therma Seal Gasket**



No. 3210-DS Conical Takeoff w/ Damper, Standoff &
Therma Seal Gasket - fabricated from galvanized steel in
diameters 4" - 20". Continuous welded longitudinal seam.
1" gasket flange with pre-drilled screw holes for easy
installation. Manual damper with 1½" damper handle standoff.

MODEL No. 3210-DS Conical Takeoff w/ Damper,

Standoff and Therma Seal Gasket



No. 3210-DS Conical Takeoff w/ Damper, Standoff &

Therma Seal Gasket - fabricated from galvanized steel in

diameters 4" - 20". Continuous welded longitudinal seam.

1" gasket flange with pre-drilled screw holes for easy

installation. Manual damper with 1½" damper handle standoff.

MODEL No. 3211 Conical Takeoff w/ Insulation Guard & Gasket




No. 3211 Conical Takeoff w/ Insulation Guard & Gasket -

fabricated from galvanized steel in diameters 4" - 20".

Continuous welded longitudinal seam. 1" gasket flange with

insulation guard.

MODEL No. 3211-D Conical Takeoff w/ Damper, Insulation Guard & Gasket



No. 3211-D Conical Takeoff w/ Damper, Insulation


Guard & Gasket - fabricated from galvanized steel in

diameters 4" - 20". Continuous welded longitudinal seam.

1" gasket flange with insulation guard. Manual damper

with locking handle.

MODEL No. 3211-DS Conical Takeoff w/ Damper, Standoff, Insulation Guard & Gasket



No. 3211-DS Conical Takeoff w/ Damper, Standoff,

Insulation Guard & Gasket - fabricated from galvanized steel
in diameters 4" - 20". Continuous welded longitudinal seam.
1" gasket flange with insulation guard. Manual damper with
locking handle and 1½" standoff.

MODEL No. 3300 45° Takeoff w/ Gasket Flange


No. 3300 45° Takeoff w/ Gasket Flange - fabricated
from galvanized steel in diameters 4" - 20". Continuous
welded longitudinal seam with 1" wide gasket flange.

MODEL No. 3300-D 45° Takeoff w/ Gasket Flange & Damper




No. 3300-D 45°Takeoff w/ Gasket Flange & Damper -
fabricated from galvanized steel in diameters 4" - 20".
Continuous welded longitudinal seam with 1" wide gasket
flange. Manual damper with locking handle.













MODEL No. 3300-DS 45° Takeoff w/ Gasket Flange, Damper & Standoff

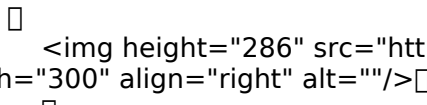



No. 3300-DS 45°Takeoff w/ Gasket Flange, Damper &
Standoff - fabricated from galvanized steel in diameters
4" - 20". Continuous welded longitudinal seam with 1" wide
gasket flange. Manual damper with locking handle and 1½"
standoff.














MODEL No. 3400 Center Takeoff w/ Gasket Flange





No. 3400 Center Takeoff w/ Gasket Flange - 

fabricated from galvanized steel in diameters 4" - 20". 

Continuous welded longitudinal seam with 

1" wide gasket flange. 




MODEL No. 3400-D Center Takeoff w/ Gasket Flange & Damper



No. 3400-D Center Takeoff w/ Gasket Flange & 

Damper -fabricated from galvanized 

steel in diameters 4" - 20".Continuous welded 

longitudinal seam with 1" wide gasket 

flange. Manual damper with locking handle. 




MODEL No. 3400-DS Center Takeoff w/ Gasket Flange, Damper & Standoff



No. 3400-DS Center Takeoff w/ Gasket Flange, Damper & Standoff - fabricated from galvanized steel in diameters 4" - 20". Continuous welded longitudinal seam with 1" wide gasket flange. Manual damper with locking handle and 1½" standoff.

MODEL No. 3710 Straight Takeoff with Gasket



No. 3710 Takeoff Collar - fabricated from galvanized steel in diameters 4" - 20". 1" flange with Therma Seal Gasket and pre-drilled screw holes for easy installation.

□
□
□
□

**MODEL No. 3710-D Straight Takeoff with Damper□□□
& Gasket**

□
□
□

□

□
□

No. 3710-D Takeoff Collar w/ Damper - fabricated from □

□
□

galvanized steel in diameters 4" - 20". 1" flange with Therma□

□
□

Seal Gasket and pre-drilled screw holes for easy installation.□

□
□

Manual damper with locking handle.□

□
□
□
□
□

**MODEL No. 3710-DS Straight Takeoff with □□□
Damper, Standoff & Gasket**

□
□
□

□

□
□

No. 3710-DS Takeoff Collar w/ Damper & Standoff - □

□
□


fabricated from galvanized steel in diameters 4" - 20". □

□
□


1" flange with Therma Seal Gasket and pre-drilled screw holes □

□
 □
 □ for easy installation. Manual damper with locking handle and □
 □
 □
 □ 1½" standoff. □
 □
 □
 □
 □
 □
 □

MODEL No. 3720 Straight Spin-In Collar

□
 □
 □
 □  □
 width="300" align="right"/> □
 □
 □
 □
 □
 □ No. 3720 Spin-In Collar - fabricated from galvanized steel □
 □
 □
 □ in diameters 4" - 20". 6" long collar with continuous welded □
 □
 □
 □ longitudinal seam. □
 □
 □
 □
 □
 □
 □

**MODEL No. 3720-D Straight Spin-In Collar □□□
with Damper**

□
 □
 □
 □  □
 width="300" align="right"/> □
 □
 □
 □
 □
 □ No. 3720-D Spin-In Collar w/ Damper - fabricated from □
 □
 □


galvanized steel in diameters 4" - 20". 6" long collar with
continuous welded longitudinal seam. Manual damper with
locking handle.

**MODEL No. 3720-DS Straight Spin-In Collar
with Damper & Standoff**

The image shows a straight spin-in collar with a damper and standoff. It is a cylindrical metal component with a locking handle and a 1 1/2 inch standoff.


No. 3720-DS Spin-In Collar w/ Damper & Standoff -
fabricated from galvanized steel in diameters 4" - 20". 6" long
collar with continuous welded longitudinal seam. Manual
damper with locking handle and 1½" standoff.

MODEL No. 3730 Tab Lock Collar

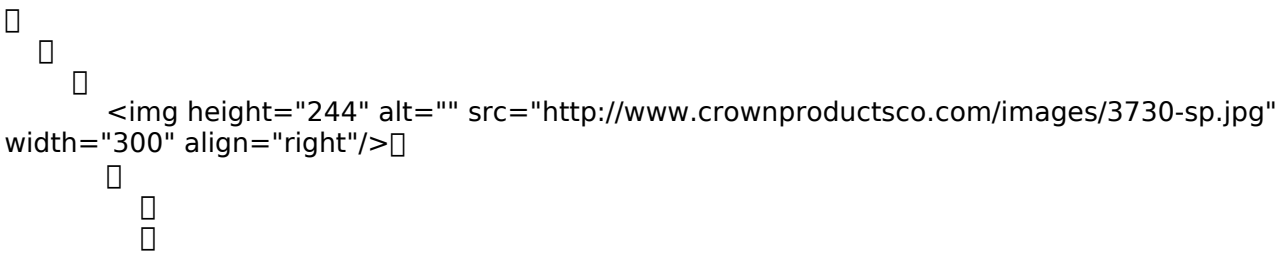
The image shows a tab lock collar, which is a cylindrical metal component with a locking handle and a tab.

No. 3730 Tab Lock Collar - fabricated from galvanized
steel in diameters 4" - 20". Continuous welded longitudinal
seam.

MODEL No. 3730-D Tab Lock Collar with Damper


No. 3730-D Tab Lock Collar w/ Damper - fabricated
from galvanized steel in diameters 4" - 20". Continuous
welded longitudinal seam. Manual damper with locking handle.

MODEL No. 3730-DS Tab Lock Collar with Damper & Standoff


No. 3730-DS Tab Lock Collar w/ Damper & Standoff -

fabricated from galvanized steel in diameters 4" - 20".
Continuous welded longitudinal seam. Manual damper with
locking handle and 1½" standoff.

MODEL No. 401 **Rectangular Duct**



No. 401 Rectangular Duct - fabricated from galvanized
steel. Available in 3 ft., 4ft. & 5 ft. lengths. Various gauges
and insulations available. Shipped in L-sections ready for
assembly with reinforcing transverse beads on 12" centers.

MODEL No. 406 **Starting Collar**




No. 406 Starting Collar - fabricated from galvanized steel. Various gauges and insulations available. Fabricated with dovetail tabs for easy installation on metal duct. Pittsburgh Lock longitudinal seams.

MODEL No. 408
Boot Tap

 ``

No. 408 Boot Tap - fabricated from galvanized steel. Various gauges and insulations available. Fabricated with dovetail tabs for easy installation on metal duct. Pittsburgh Lock longitudinal seams. 45° takeoff for maximum air flow. For use with all No. 400 Series rectangular duct.

MODEL No. 411 End Cap



No. 411 End Cap - fabricated from galvanized steel.

Various gauges and insulations available.


For use with all No. 400 Series rectangular duct.

MODEL No. 412 Flex Connector



No. 412 Flex Connector - available in residential and commercial grades. For use with all No. 400 Series rectangular duct and fittings. Spot welded longitudinal seams.

MODEL No. 416 Reducer / Increaser

□
□
□
□ □
width="300" align="right"/>□


□
□
□
□
□ No. 416 Reducer / Increaser - fabricated from galvanized □
□
□ steel. Various gauges and insulations available. For use □
□
□ with all No. 400 Series rectangular duct. Pittsburgh Lock □
□
□ longitudinal seams.□

MODEL No. 420 Transition

□
□
□
□ □
width="300" align="right"/>□

□
□
□
□ No. 420 Transition - fabricated from galvanized steel. □
□
□ Various gauges and insulations available. For use with all □
□
□ with all No. 400 Series rectangular duct. Pittsburgh Lock □
□
□ longitudinal seams.□

MODEL No. 422 Manual Damper




No. 422 Manual Damper - fabricated from galvanized steel.

Available in various gauges with locking damper handle. For

use with all No. 400 Series rectangular duct.

MODEL No. 430 90° Long Way Elbow




No. 430 90° Long Way Elbow - fabricated from galvanized

steel. Available in various gauges and insulations.

Pittsburgh lock longitudinal seams. For use with all No. 400

Series rectangular duct.

MODEL No. 435 45° Long Way Elbow



No. 435 45° Long Way Elbow - fabricated from galvanized

steel. Available in various gauges and insulations. Pittsburgh

lock longitudinal seams. For use with all No. 400

Series rectangular duct.

MODEL No. 440 90° Short Way Elbow



No. 440 90° Short Way Elbow - fabricated from

galvanized steel. Available in various gauges and insulations.

Pittsburgh lock longitudinal seams. For use with all No. 400


Series rectangular duct.



MODEL No. 445 45° Short Way Elbow




No. 445 45° Short Way Elbow - fabricated from
galvanized steel. Available in various gauges and insulations.
Pittsburgh lock longitudinal seams. For use with all No. 400
Series rectangular duct.

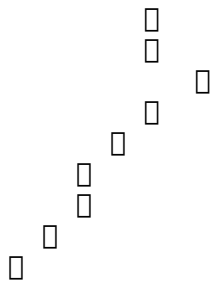

MODEL No. 490 4" Turning Vane



No. 490 4" Turning Vane - fabricated from 24ga.
galvanized steel and supplied in 10 ft. sections.



Vane width = 5½" For use with No. 492 Push-on vane rail.

MODEL No. 492 4" Push-On Rail



 ``



No. 492 4" Push-On Rail - fabricated from 24ga.



galvanized steel and supplied in 10 ft. sections.



For use with No. 490 4" turning vane.



MODEL No. 496 2" Turning Vane



 ``



No. 496 2" Turning Vane - fabricated from 24ga.



galvanized steel and supplied in 10 ft. sections.








For use with No. 498 push-on rail.



MODEL No. 498 2" Push-On Rail




No. 498 2" Push-On Rail - fabricated from 24ga. 
galvanized steel and supplied in 10 ft. sections. 
For use with No. 4962" turning vane.



MODEL No. 801 Rectangular Duct

No. 801 Rectangular Duct - fabricated from galvanized steel. Available in 3 ft., 4ft. & 5 ft. lengths. Various gauges and insulations available. Shipped in L-sections ready for assembly with reinforcing transverse beads on 12" centers.

MODEL No. 806 Starting Collar




No. 806 Starting Collar - fabricated from galvanized

□
□
steel. Various gauges and insulations available. Fabricated□
□
□
with dovetail tabs for easy installation on metal duct. □
□
□
Pittsburgh Lock longitudinal seams.□
□
□
□
□
□
□

MODEL No. 808 Boot Tap

□
□
□
□
□
□
□
No. 808 Boot Tap - fabricated from galvanized steel.□
□
□
steel. Various gauges and insulations available. Fabricated□
□
□
with dovetail tabs for easy installation on metal duct. □
□
□
Pittsburgh Lock longitudinal seams. 45° takeoff for maximum□
□
□
air flow. For use with all No. 800 Series rectangular duct.□
□
□
□
□
□
□
□
□

MODEL No. 811 End Cap

□
□
□

□

□

□

□

No. 811 End Cap - fabricated from galvanized steel. □

□

□

Various gauges and insulations available. □

□

□

For use with all No. 800 Series rectangular duct. □

□

□

□

□

□

□

MODEL No. 812 Flex Connector

□

□

□

 ``

□

□

□

□

No. 812 Flex Connector - available in residential and □

□

□

commercial grades. For use with all No. 800 Series □

□

□

rectangular duct and fittings. Spot welded longitudinal□

□

□

seams.□

□

□

□

□

□

□

MODEL No. 816 Reducer / Increaser

□

□

□

 `

□

□

□

□

No. 816 Reducer / Increaser - fabricated from galvanized □

□

□

steel. Various gauges and insulations available. For use □

□

□

with all No. 800 Series rectangular duct. Pittsburgh Lock □

□

□

longitudinal seams.□

□

□

□

□

□

□

MODEL No. 820 Transition

□

□

□

□

□

□

□

□

□

No. 820 Transition - fabricated from galvanized steel. □

□

□

Various gauges and insulations available. For use with all □

□

□

with all No. 800 Series rectangular duct. Pittsburgh Lock □

□

□

longitudinal seams.□

□

□

□

□

□

□

MODEL No. 830 90° Long Way Elbow

□

□
□
□ 
width="300" align="right" alt=""/>□

□
□
□
□ No. 830 90° Long Way Elbow - fabricated from galvanized□
□
□ steel. Available in various gauges and insulations. □
□
□ Pittsburgh lock longitudinal seams. For use with all No. 800□
□
□ Series rectangular duct.□

MODEL No. 835 45° Long Way Elbow

□
□
□
□
□
□
□
□ No. 835 45° Long Way Elbow - fabricated from galvanized□
□
□ steel. Available in various gauges and insulations. □
□
□ Pittsburgh lock longitudinal seams. For use with all No. 800□
□
□ Series rectangular duct.□

MODEL No. 840 90° Short Way Elbow

MODEL No. SP6101 Spiral Pipe



No. SP6101 Spiral Pipe - fabricated from galvanized steel in diameters 4" - 32". Standard joint length - 10-ft. long.
Also available in paint-grip steel.
4" thru 14" = 26 gauge
16" thru 26" = 24 gauge
28" thru 32" = 22 gauge

MODEL No. SP6111 90° Elbow



No. SP6111 90° Elbow - fabricated from galvanized steel in diameters 4" - 32". Also available in paint-grip steel.
4" thru 12" = Die Stamped Construction

14" thru 32" = Gorelock Construction

MODEL No. SP6121 45° Elbow




No. SP6121 45° Elbow - fabricated from galvanized steel

in diameters 4" - 32". Also available in paint-grip steel.

4" thru 12" = Die Stamped Construction

14" thru 32" = Gorelock Construction

MODEL No. SP6265 Reducer




No. SP6265 Reducer - fabricated from galvanized steel

in diameters 4" - 32". For use with No. SP6101 spiral pipe.

Also available in paint-grip steel.

MODEL No. SP6271 90° Tee



No. SP6271 90° Tee - fabricated from galvanized steel

in diameters 4" - 32". For use with No. SP6101 spiral pipe.

Also available in paint-grip steel.


MODEL No. SP6271R Reducing 90° Tee




No. SP6271R Reducing 90° Tee - fabricated from

galvanized steel in diameters 4" - 32". For use with

No. SP6101 spiral pipe. Also available in paint-grip steel.




MODEL No. SP6273 End Cap

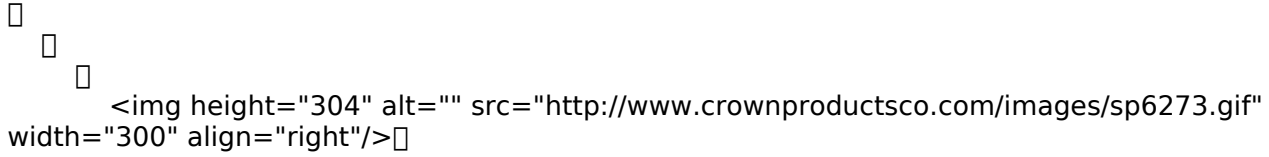

No. SP6273 End Cap - fabricated from galvanized steel
in diameters 4" - 32". For use with No. SP6101 spiral pipe.
Also available in paint-grip steel.



MODEL No. SP6276 45° Lateral

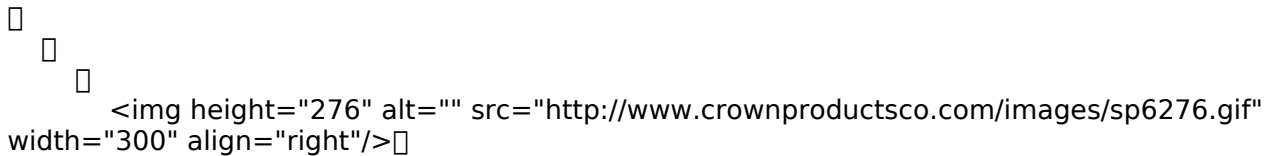

No. SP6276 45° Lateral - fabricated from galvanized steel
in diameters 4" - 32". For use with No. SP6101 spiral pipe.
Also available in paint-grip steel.




□

MODEL No. SP6276R Reducing 45° Lateral

□

□

□

□

□

□

□

□

□

□

□

□

□

□

□

□

□

□

□

□


□

MODEL No. SP6307 Saddle Tap□□□

□

□

□

□

□

□

□

□

□

□

□

□

□

□

□

□


□

□

□

□

MODEL No. SP6680 Coupling


``

No. SP6680 Coupling - fabricated from galvanized steel

in diameters 4" - 32". Used to join together sections

of No. SP6101 spiral pipe.

Rectangular Duct Work & Fittings

There are no articles in this category.

Transverse Connectors & Turning Vanes

There are no articles in this category.

Bolt-Together Rectangular Duct Work & Fittings (TDF)

There are no articles in this category.

Spiral Pipe & Fittings

There are no articles in this category.

Commercial Takeoff Fittings

There are no articles in this category.

Residential

MODEL No. 101 **Galvanized Snaplock Pipe**



No. 101 Snaplock Pipe - fabricated from galvanized steel in diameters 3" - 20". Pipe is available in U.S. gauges 30ga. - 24ga. with Reeves Snaplock longitudinal seam. Also available in aluminum & stainless steel

□
□

MODEL No. 105 □ ALUMINUM FLEXIBLE PIPE

□
□
□
□  No. 105 Flexell Pipe - available in


□ diameters 3" - 10", 8-Ft. long sections.

□ Fabricated from .005" thick aluminum metal
□ alloy 1100. Listed U.L. 181. Ideal for bathroom
□ exhaust. Not recommended for range hoods.

□
□ No. 107 Flexell Pipe - 8-Ft. section
□ compressed to 38". Available in diameters
□ 3" - 8". Compressed pipe is not covered by
□ U.L. 181 test procedure.

□
□
□

MODEL No. 111 □ Adjustable 90 Degree Elbow


□
□
□
□  No. 111 Adjustable 90° Elbow - fabricated

□
□
□
□ from galvanized steel in diameters 3" - 30". □
□


□
□ Diameters 3" - 20" are four piece construction; □

□
□
22" and larger are five piece. Also available□
□
□
in aluminum and stainless steel.□
□
□
□
□
□
□

MODEL No. 121□ Adjustable 45 Degree Angle


□
□
□
□
□
□
□
□
No. 121 Adjustable 45° Angle - fabricated □
□
□
from galvanized steel in diameters 4" - 30".□
□
□
Also available in aluminum & stainless steel.□
□
□
□
□
□
□
□
□
□
□
□
□
□
□

MODEL No. 1242 Framed Boot


□
□
□
□
□
□
□

No. 1242 Framed Boot - fabricated from 30ga. galvanized
steel. Insulated with R-4.2 insulation. 3" straight away on
rectangular end. ½" outboard flange with ½" drywall flange.

MODEL No. 1242-FL Framed Boot


No. 1242-FL Framed Boot - fabricated from 30ga. galvanized steel. Insulated with R-6 insulation. 3" straight away on rectangular end. ½" outboard flange with ½" drywall flange.

MODEL No. 1243-FL Angle Floor Boot



No. 1243-FL Angle Floor Boot - fabricated from 30ga. □

□
□

galvanized steel. Insulated with R-6 insulation. □

□
□

1" flange to accommodate floor thickness. Black interior.□

□

□

□
□

□

□

MODEL No. 1244-FL Center End Floor Boot

□
□
□
□
width="300" align="right"/>□

□

□

□

No. 1244-FL Center End Floor Boot - fabricated from □

□

□

30ga. galvanized steel. Insulated with R-6 insulation. □

□

□

1" flange to accommodate floor thickness. Black interior.□

□

□

□

□

□

□

MODEL No. 1250 Mounting Bracket, 24 Gauge

□
□
□
□
width="300" align="right" alt=""/>□

□

□


□

No. 1250 Mounting Bracket - fabricated from 24 gauge□

□


□

galvanized steel; 100 per carton. Clip-on bracket for use □

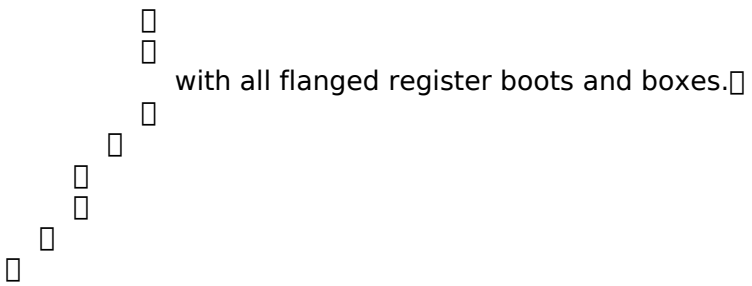


with all flanged register boots and boxes.

MODEL No. 1250-16 Mounting Bracket, 24 Gauge 16" long



``




No. 1250-16 Mounting Bracket - fabricated from 24 gauge galvanized steel; 100 per carton. Clip-on bracket



for use with all flanged register boots and boxes. Designed



for 16" trusses.



MODEL No. 1252 Mounting Bracket, 25" Long



``




No. 1252 Mounting Bracket - fabricated from 26 gauge



galvanized steel; 100 per carton. Clip-on bracket for use
with all flanged register boots and boxes.

MODEL No. 1254 Mounting Bracket, 25" Long

 ``

No. 1254 Mounting Bracket - fabricated from 26 gauge
galvanized steel; 100 per carton. Screw-on bracket for use
with all unflanged register boots and boxes.

Model No. 1260 Mounting Angle

 ``

No. 1260 Mounting Angle - fabricated from 18 ga.

galvanized steel. Screw-on angle with pre-punched holes.

1½" x 1½" angle, 26" long.

MODEL No. 1269 Framed Box w/ Side Collar



No. 1269 Framed Box - fabricated from 28ga.

galvanized steel. Insulated with R-4.2 insulation.

Box height = 5" plus collar diameter. ½" outboard

flange with ½" drywall flange.

MODEL No. 1269-FL Framed Box w/ Side Collar



No. 1269-FL Framed Box - fabricated from 28ga.

galvanized steel. Insulated with R-6 insulation. Box height = 5" plus collar diameter. ½" outboard flange with ½" drywall flange.

MODEL No. 1275 Framed Box w/ Top Collar

 ``

No. 1275 Framed Box - fabricated from 30ga. galvanized steel. Insulated with R-4.2 insulation.

Box height = 4½". ½" outboard flange with ½" drywall flange.

MODEL No. 1284 Duct Board Box w/o Flange

 ``

N. 1284 Duct Board Box w/o Flange - fabricated from

□
 □
 30ga. galvanized steel & 1" thick duct board; R-4.2. Black□
 □
 □
 interior with ½" drywall flange. □
 □
 □
 □
 □
 □
 □

MODEL No. 1288 Duct Board Box w/ Flange

□
 □
 □
 □
 □
 □
 □
 □
 No. 1288 Duct Board Box - fabricated from 30 ga.□
 □
 □
 galvanized steel & 1" thick duct board; R-4.2. Black□
 □
 □
 interior with ½" outboard flange and ½" drywall flange.□
 □
 □
 □
 □
 □
 □
 □

**MODEL No. 1288-FL Duct Board Box □□□
with Flange**

□
 □
 □
 □
 □
 □
 □
 □
 No. 1288-FL Duct Board Box - fabricated from 30 ga.□
 □
 □
 □

galvanized steel and 1½" thick duct board; R-6. Black

interior with ½" outboard flange and ½" drywall flange.

MODEL No. 1288-FLG Duct Board Box w/ Flange and Therma Seal Gasket



No. 1288-FLG Duct Board Box - fabricated from 30 ga.

galvanized steel and 1½" thick duct board; R-6. Black

interior with ½" outboard flange and ½" drywall flange.

Therma Seal Gasket applied to flange to seal box to

drywall.

MODEL No. 1292 Duct Board Box w/ Flange 11" Tall



width="300" align="right"/>

□

□

□

□

No. 1292 Duct Board Box w/ Flange - fabricated from

□

□

30ga. galvanized steel and 1" thick duct board; R-4.2.

□

□

Black interior with ½" outboard flange and ½" drywall

□

□

flange.

□

□

□

□

□

□

MODEL No. 1292-FL Duct Board Box w/ Flange, 11" Tall

□

□

□

 width="300" align="right"/>

□

□

□

□

No. 1292-FL Duct Board Box w/ Flange - fabricated from

□

□

30ga. galvanized steel and 1½" thick duct board; R-6.

□

□

Black interior with ½" outboard flange and ½" drywall

□

□

flange.

□

□

□

□

□

□

MODEL No. 1298 Slant Top Duct Board Box with Flange



















No. 1298 Slant Top Duct Board Box w/ Flange -
fabricated from 30ga. galvanized steel and 1" thick duct
board; R-4.2. Black interior with ½" outboard flange and
½" drywall flange.

MODEL No. 1298-FL Slant Top Duct Board Box with Flange




No. 1298-FL Slant Top Duct Board Box w/ Flange -
fabricated from 30ga. galvanized steel and 1½" thick duct
board; R-6. Black interior with ½" outboard flange and
½" drywall flange.

MODEL No. 1480 Rectangle-to-Round Transition, R-4 Insulation

MODEL No. 1575-CRD Ceiling Radiation Damper Box, Top Collar



No. 1575-CRD Ceiling Radiation Damper Box -

fabricated from galvanized steel and insulated with 1½" insulation, R-6. UL approved damper and box assembly.

MODEL No. 1575-G Framed Box w/ Therma Seal Gasket, Silver Interior



No. 1575-G Framed Box - fabricated from 30ga. galvanized steel and insulated with 1½" insulation, R-6.




Silver interior with ½" outboard flange and ½" drywall flange.

Therma Seal Gasket applied to flange to seal box to drywall.



MODEL No. 1580 Framed Box, Black Interior








No. 1580 Framed Box - fabricated from 30ga. galvanized

steel and insulated with 1½" insulation, R-6. Black interior

with ½" outboard flange and ½" drywall flange.



MODEL No. 1580-G Framed Box w/ Therma Seal Gasket, Black Interior




No. 1580-G Framed Box - fabricated from 30ga.

galvanized steel and insulated with 1½" insulation, R-6.

Black interior with ½" outboard flange and ½" drywall flange.

Therma Seal Gasket applied to flange to seal box to

drywall.

MODEL No. 1713 Trunk Line Reducer Box 1" Duct Board



No. 1713 Trunk Line Reducer Box - fabricated from 1" duct board. Three piece construction; wrapper and 2 ends. Shipped knocked down and shrink wrapped.

MODEL No. 1713-FL Trunk Line Reducer Box 1½" Duct Board



No. 1713-FL Trunk Line Reducer Box - fabricated from 1½" duct board. Three piece construction; wrapper and

2 ends. Shipped knocked down and shrink wrapped.

MODEL No. 1715 Triangle Box
1" Duct Board



No. 1715 Triangle Box - fabricated from 1" duct board.

Three piece construction; wrapper and 2 ends. Shipped

knocked down and shrink wrapped.

MODEL No. 1715-FL Triangle Box
1-1/2" Duct Board



No. 1715-FL Triangle Box - fabricated from 1½" duct


board. Three piece construction; wrapper and 2 ends.

Shipped knocked down and shrink wrapped.

collar and insulation options. See spec sheet for more

information.

MODEL No. 201 Wallstack Duct


 ``

No. 201 Wallstack Duct - fabricated from galvanized steel.

Furnished in half sections, nested and strapped with button-


punch snaplock longitudinal seam. Standard length, 3 ft.

MODEL No. 223 Stackhead

 ``

No. 223 Stackhead - fabricated from galvanized steel.







Available in various sizes. Standard throat height, 12" tall.




MODEL No. 230

Long Way Elbow, 90 Degree













No. 230 90° Long Way Elbow - fabricated from 

galvanized steel. Standard throat size, 3" x 3". 

Available in various gauges and sizes. 



MODEL No. 231

Straight Boot










No. 231 Straight Boot - fabricated from 30ga. galvanized 

steel. Stacking clips installed on rectangular end for easy 

connection to No. 201 wallstack duct. Available in various 

sizes. Flat on one side. 



MODEL No. 232 Range Hood Transition








No. 232 Range Hood Transition - fabricated from 30ga. 

galvanized steel. 3" straight away on rectangular end.

Flat on one side.




MODEL No. 233 90° Angle Boot




No. 233 90° Angle Boot - fabricated from 30ga. galvanized steel. 3" straight away
on rectangular end.

Straight female connection on round end.





MODEL No. 234

Center End Boot












No. 234 Center End Boot - fabricated from 30ga. 





galvanized steel. Straight female connection on round end.













MODEL No. 235

Long Way Elbow, 45 Degree













No. 235 45° Long Way Elbow - fabricated from 






galvanized steel. Standard throat size, 3" x 3".





Available in various gauges and sizes. 











□

MODEL No. 236 **Adjustable Offset Boot**

□

□

□

``

□

□

□

□

No. 236 Adjustable Offset Boot - fabricated from 30ga. □

□

□

galvanized steel. Adjustable 45° collar on round end.□

□

□

□

□

□

□

MODEL No. 240 **Short Way Elbow, 90 Degree**

□

□

□

``

□

□

□

□

No. 240 90° Short Way Elbow - fabricated from □

□

□

galvanized steel. Standard throat size, 3" x 3".□

□

□

Available in various gauges and sizes. □

□

□

□

□

□

□

MODEL No. 241 Straight Boot























































No. 243 90° Angle Boot - fabricated from 30ga. galvanized steel. 3" straight away on rectangular end. 

















MODEL No. 243-F 90° Angle Boot with Drywall Flange









No. 243-F 90° Angle Boot w/ Drywall Flange - 


fabricated from 30ga. galvanized steel. 3" straight away 


on rectangular end. 1" outboard flange with ½" drywall 


flange. 

MODEL No. 244 Center End Boot





□

□

□

□

No. 244 Center End Boot - Fabricated from 30ga. □

□

□

galvanized steel. 3" straight away on rectangular end. □

□

□

□

□

□

□

MODEL No. 244-F Center End Boot with □□□ Drywall Flange

□

□

□

□

□

□

□

No. 244-F Center End Boot w/ Drywall Flange - □

□

□

fabricated from 30ga. galvanized steel. 3" straight away □

□

□

on rectangular end. 1" outboard flange with ½" drywall□

□

□

flange.□

□

□

□

□

□

□

MODEL No. 245□ Short Way Elbow, 45 Degree

□

□

□

width="300" align="right" alt=""/>

□

□

□

□

No. 245 45° Short Way Elbow - fabricated from □

□

□

galvanized steel. Standard throat size, 3" x 3". □

□

□

Available in various gauges and sizes. □

□

□

□

□

□

□

MODEL No. 246

Adjustable Boot

□

□

□


width="300" align="right" alt=""/>

□

□

□

□

No. 246 Adjustable Boot - Fabricated from 30ga. □

□

□

galvanized steel. 3" straight away on rectangular end □

□

□

with an adjustable collar.□

□

□

□

□

□

□

MODEL No. 261 Tab Collar-3" Long

□

□


□


width="300" align="right" alt=""/>

□

No. 261 Tab Collar - fabricated from 30ga. galvanized steel in diameters 4" - 20". 3" long collar with tabs for easy installation.

MODEL No. 261-L Tab Collar - 6" Long



No. 261-L Tab Collar - fabricated from 30ga. galvanized steel in diameters 4" - 20". 6" long collar with tabs for easy installation.

MODEL No. 265 REDUCER / INCREASER



Placeholder for image of Model No. 265 Reducer / Increaser.

No. 265 Tapered Reducer - fabricated
from galvanized steel in diameters 3" - 30".
Also available in aluminum & stainless steel.

MODEL No. 265 Tapered Reducer


No. 265 Tapered Reducer - fabricated
from galvanized steel in diameters 3" - 30".
Also available in aluminum & stainless steel.

MODEL No. 266 FLAT REDUCER


No. 266 Flat Reducer - fabricated from

28ga. galvanized steel in diameters 4" - 30".

MODEL No. 269 Register Box

 ``

No. 269 Register Box - fabricated from 30ga. galvanized steel. 3" long collar with 1/2" drywall flange. Box height = 5" plus collar diameter.

MODEL No. 273 End Cap

 ``

No. 273 Round End Cap - fabricated from 26ga.

galvanized steel in diameters 4" - 24".

MODEL No. 275 Damper

 ``

No. 275 Manual Volume Damper - fabricated from

galvanized steel in diameters 4" - 20". Fabricated with

$\frac{1}{4}$ " regulators and locking handle.

MODEL No. 276 IN-LINE WYE

 ``

No. 276 In-Line Wye - fabricated from

galvanized steel in diameters 4" - 24". Wyes

are available in U.S. gauges 30ga. - 24ga. Also

□
□
available in aluminum & stainless steel.□
□
□
□
□
□
□

MODEL No. 277□ **BULL NOSE WYE**

□
□
□
□
□

□
□
□
□
□
No. 277 Bull Nose Wye - fabricated from □
□
□
galvanized steel in diameters 4" - 24". Wyes□
□
□
are available in U.S. gauges 30ga. - 24ga. Also □
□
□
available in aluminum & stainless steel.□
□
□
□
□
□
□
□

MODEL No. 278□ **ADJUSTABLE WYE**

□
□
□
□
□

□
□
□
□
□
No. 278 Adjustable Wye - fabricated from □
□

galvanized steel in diameters 4" - 24". Wyes
are available in U.S. gauges 30ga. - 24ga. Also
available in aluminum & stainless steel.

MODEL No. 279
ADJUSTABLE WYE 2-WAY

 ``

No. 279 2-Way Adjustable Wye - fabricated
from galvanized steel in diameters 4" - 24".
Wyes are available in U.S. gauges 30ga. - 24ga.
Also available in aluminum & stainless steel.

MODEL No. 301
Plenum



□

□

□

□

No. 301 Plenum - fabricated from galvanized steel. □

□

□

Shipped knocked down and strapped - 5 piece construction.□

□

□

Button punch snaplock longitudinal seam. Available in□

□

□

various gauges and insulations.□

□

□

□

□

□

□

MODEL No. 305

TAKEOFF from ROUND PIPE

□

□

□

□

□

□

□

No. 305 Round Takeoff - fabricated from□

□

□

galvanized steel in diameters 4" - 20". □

□

□

Rectangular end is flanged with straight tabs □

□

□

contoured to fit radius of round trunk pipe.□

□

□

Also available in aluminum & stainless steel.□

□

□


□

□

□


□

MODEL No. 306 ADJUSTABLE TAKEOFF

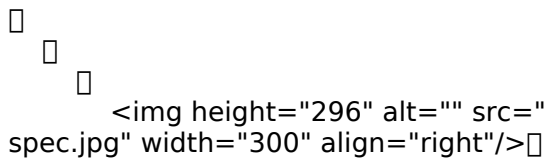 ``

No. 306 Adjustable Takeoff - fabricated from
galvanized steel in diameters 4" - 20", with
adjustable collar. Rectangular end is flanged with
straight tabs designed to fit rectangular trunk duct.
Also available in aluminum & stainless steel.

MODEL No. 307 SADDLE TAKEOFF

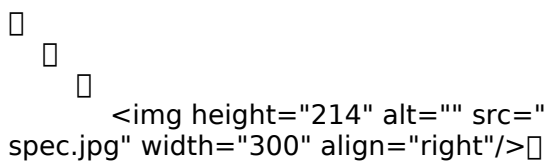 ``

No. 307 Saddle Takeoff - fabricated from
galvanized steel in diameters 4" - 14". Bottom
plate contoured to fit round trunk pipe. Also
available in aluminum & stainless steel.

MODEL No. 308 TOP TAKEOFF



No. 308 Top Takeoff - fabricated from

galvanized steel in diameters 4" - 14".

Rectangular end is flanged with straight tabs

designed to fit rectangular trunk duct. Also

available in aluminum & stainless steel.


MODEL No. 309 SIDE TAKEOFF



No. 309 Side Takeoff - fabricated from

galvanized steel in diameters 4" - 14".
Rectangular end is flanged with straight tabs
designed to fit rectangular trunk duct. Also
available in aluminum & stainless steel.

MODEL No. 310 Saddle Collar with Therma Seal Gasket


No. 310 Takeoff Collar - fabricated from galvanized steel
in diameters 4" - 14". Contoured flange with Therma Seal
Gasket designed to fit round pipe.

MODEL No. 312 Saddle Collar with Scoop, Therma Seal Gasket



No. 312 Takeoff Collar w/ Scoop - fabricated from
galvanized steel in diameters 4" - 14". Contoured flange
with Therma Seal Gasket designed to fit round pipe.

MODEL No. 314
Saddle Collar with Damper, Therma Seal Gasket



No. 314 Takeoff Collar w/ Damper - fabricated from
galvanized steel in diameters 4" - 14". Contoured flange
with Therma Seal Gasket designed to fit round pipe.
Manual damper with locking handle.

MODEL No. 316 Saddle Collar with Scoop **Damper, Therma Seal**
Gasket

 width="300" align="right" alt=""/>

□

□

□

□

No. 316 Takeoff Collar w/ Scoop & Damper - □

□

□

from galvanized steel in diameters 4" - 14". □

□

□

Contoured flange with Therma Seal Gasket designed to □

□

□

fit round pipe. Manual damper with locking handle. □

□

□

□

□

□


□

MODEL No. 332 Vent Top w/ Wind Band

□

□

□

 width="300" align="right" alt=""/>

□

□

□

□

No. 332 Vent Top - fabricated from galvanized steel in□

□

□

diameters 4" - 18". Available with ¼" hardware cloth.□

□

□

□

□

□

□

MODEL No. 334 Vent Top

□

□

□

 width="300" align="right" alt=""/>

□

No. 334 Vent Top - fabricated from 28ga. galvanized steel in diameters 3" - 10". 4" long base collar.

MODEL No. 336 Roof Flashing



No. 336 Roof Flashing - fabricated from galvanized steel in diameters 3" - 18". Cone is spot welded and sealed to plate with silicone sealant. Standard 4/12 pitch.

MODEL No. 339 Storm Collar



No. 339 Storm Collar - fabricated from galvanized steel

in diameters 3" - 18". Standard 2" width on all sizes.

MODEL No. 341 Roof Jack for Flat Roof



No. 341 Roof Jack - fabricated from 28ga. galvanized steel in diameters 3" - 10". Cone is spot welded and sealed to flashing with silicone sealant.

MODEL No. 341-P Roof Jack for Pitched Roof



No. 341-P Roof Jack - fabricated from 28ga. galvanized steel in diameters 3" - 10". Cone is spot welded and sealed to flashing with silicone sealant. Standard 4/12

pitch.

MODEL No. 349 Sidewall Vent



No. 349 Side Wall Vent - fabricated from galvanized steel in diameters 3" - 12". ¼" hardware cloth installed over hole. Also available with back draft damper.

MODEL No. 350 Roof Cap with Round Collar



No. 350 Roof Cap - fabricated from 28ga. galvanized steel in diameters 3" - 10". ¼" hardware cloth installed in exhaust opening. Round collar is sealed to plate with

silicone sealant.

MODEL No. 350-D Roof Cap with Round Collar & Gravity Damper




No. 350-D Roof Cap - fabricated from 28ga. galvanized steel in diameters 3" - 10". Round collar is sealed to plate with silicone sealant. Hinged light gauge back draft damper installed.

MODEL No. 350-R Roof Cap with Rectangular Hole



No. 350-R Roof Cap - fabricated from 28ga. galvanized steel. Available sizes: 5" x 5" and 11" x 11". 1/4" hardware

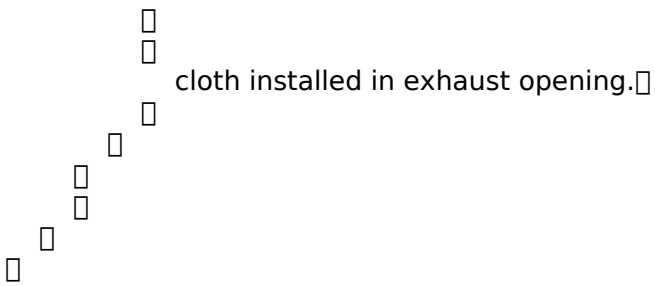

cloth installed in exhaust opening.

MODEL No. 350-RD
Roof Cap with Rectangular Hole & Damper




```

```

No. 350-RD Roof Cap - fabricated from 28ga. galvanized steel. Available sizes: 5" x 5" and 11" x 11". 1/4" hardware cloth installed in exhaust opening. Hinged back draft damper installed.







MODEL No. 353
Roof Jack for Refrigerant Lines



MODEL No. 357
Blind Box, 12" High









No. 357 Blind Box - fabricated from 28ga. galvanized


steel. Standard 12" tall.












MODEL No. 360
Aluminum Ventilator with Screen








No. 360 Aluminum Roof Ventilator - fabricated from


.045" thick aluminum 1100. Screen installed in flashing.










MODEL No. 360-D Aluminum Roof Ventilator with Damper





No. 360-D Aluminum Roof Ventilator w/ Damper - □

□
□

fabricated from .045" thick aluminum 1100. Spring loaded □

□
□

back draft damper installed in flashing.□

□

□
□

□

□

MODEL No. 360-DX Aluminum Ventilator with Extension & Damper

□

□
□

``

□

□
□

No. 360-DX Aluminum Roof Ventilator w/ Damper □

□
□

and Extension. - fabricated from .045" thick aluminum□

□
□

1100. 4" extension and spring loaded back draft damper□

□
□

installed in flashing.□

□

□
□

□

□

MODEL No. 360-X Aluminum Ventilator with Extension

□

□
□

``

□

□
□

□

No. 360-X Aluminum Roof Ventilator w/ Extension - □

□
□

fabricated from .045" thick aluminum 1100. Screen□

□
□

installed in flashing. 4" extension installed at base off□

□
□

flashing.□

□

□

□

□

□

□

MODEL No. 412-R Flex Connector for Round Duct

□

□

□

``

□

□

□

□

No. 412-R Round Flex Connector - available in 28ga.□

□

□

and 24ga. galvanized steel. For use with No. 480 and □

□

□

No. 1480 transitions.□

□

□

□

□

□

□

MODEL No. 450 Universal Access Door

□

□

□

``

□

□

□

□


No. 450 Universal Access Door - fabricated from

 galvanized steel in sizes 6" x 6" - 24" x 24". Designed

 for installation in sheet metal and duct board. Custom

 sizes available upon request.

MODEL No. 465 Expand-O-Duct, 12x12



 ``

 No. 465 Expand-O-Duct - fabricated from 22 ga.

 galvanized steel. 12" x 12" expands to 22" x 22". Ideal

 as inside liner for fiberglass duct to support fire damper.

MODEL No. 469 Expand-O-Dut, 16x16


 ``

No. 469 Expand-O-Duct - fabricated from 22 ga.

□
□

galvanized steel. 16" x 16" expands to 30" x 30". Ideal □

□
□

as inside liner for fiberglass duct to support fire damper.□

□

□
□

□

□

MODEL No. 480 Rectangle-to-Round Transition

□

□

□

``□

□

□

□

□

No. 480 Transition Rectangle / Round - fabricated from□

□

□

galvanized steel in gauges 28 - 22. Standard overall height,□

□

□

12" long. Center taper with riveted longitudinal seam.□

□

□

□

□

□

□

MODEL No. 612 Can Stock

□

□

□

``□

□

□

□

□

No. 612 Can Stock - fabricated from 30ga. galvanized □

□

□

steel. Available in 10 ft. lengths, 250 ft. per carton.

MODEL No. 616 Tab Collar



No. 616 Tab Collar - fabricated from


galvanized steel in diameters 3" -20". New

"easy bend" tabs result in 1/3 less tabs to bend.

Collar can be installed in 1" and 1 1/2" duct

board.

MODEL No. 616-D Tab Collar w/ Damper



No. 616-D Tab Collar w/ Damper - fabricated from

galvanized steel in diameters 3" - 20". New "easy
bend" tabs result in 1/3 less tabs to bend. Collar can
be installed in 1" and 1½" duct board. Manual
damper with locking handle.

MODEL No. 616-DS Tab Collar w/ Scoop and Damper



No. 616-DS Tab Collar w/ Scoop & Damper -
fabricated from glvanized steel in diameters
3" - 20". New "easy bend" tabs result in 1/3 less
tabs to bend. Collar can be installed in 1" and 1½"
duct board. Manual damper with locking handle.

MODEL No. 616-G Tab Collar w/ Therma Seal Gasket




No. 616-G Tab Collar w/ Therma Seal Gasket -
fabricated from galvanized steel in diameters
3" - 20". New "easy bend" tabs result in 1/3 less
tabs to bend. Collar can be installed in 1" and 1½"
duct board. Therma Seal Gasket applied to flange
for sealing collar to duct board.

MODEL No. 619 Inside Ring




No. 619 Inside Ring - fabricated from galvanized
steel in diameters 4" - 20". For use with all No. 616
model tab collars.

MODEL No. 620 Twist Lock Collar for 1" Duct Board

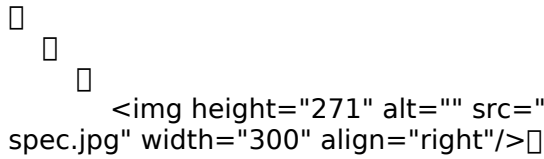


No. 620 Twist Lock Collar - fabricated from 30ga. galvanized steel in diameters 4" - 20". Convex bead for flex duct connection.

MODEL No. 620-FL Twist Lock Collar for 1½" Duct Board

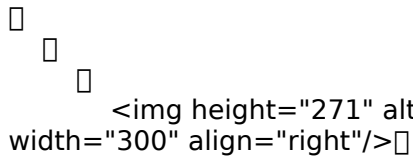

No. 620-FL Twist Lock Collar - fabricated from 30ga. galvanized steel in diameters 4" - 20". Convex bead for flex duct connection.

**MODEL No. 622 Twist Lock Collar with
Scoop for 1" Duct Board**

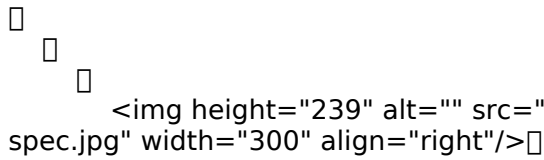

No. 622 Twist Lock Collar w/ Scoop - fabricated

from 30ga. galvanized steel in diameters 4" - 20".

Convex bead for flex duct connection.

**MODEL No. 622-FL Twist Lock Collar with
Scoop for 1½" Duct Board**




No. 622-FL Twist Lock Collar w/ Scoop - fabricated

from 30ga. galvanized steel in diameters 4" - 20".

Convex bead for flex duct connection.

MODEL No. 624 Twist Lock Collar with Damper for 1" Duct Board



No. 624 Twist Lock Collar w/ Damper - fabricated
from 30ga. galvanized steel in diameters 4" - 20".
Convex bead for flex duct connection. Manual
damper with locking handle.

MODEL No. 624-FL Twist Lock Collar with Damper for 1-1/2" Duct Board

















No. 624-FL Twist Lock Collar w/ Damper - fabricated
from 30ga. galvanized steel in diameters 4" - 20".
Convex bead for flex duct connection. Manual
damper with locking handle.



MODEL No. 626 Twist Lock Collar w/ Scoop & Damper for 1" Duct Board










No.626 Twist Lock Collar with Scoop & 


Damper fabricated from 30ga. galvanized steel 


in diameters 4" - 20". Convex bead for flex duct 


connection. Manual damper with locking 


handel. 



MODEL No. 626-FL Twist Lock Collar with Scoop & Damper for 1½" Duct Board




No. 626-FL Twist Lock Collar w/ Scoop & Damper - 


fabricated from 30ga. galvanized steel in diameters 


4" - 20". Convex bead for flex duct connection. Manual damper with locking handle.


MODEL No. 640 Ring Seal Collar For 1" Duct Board
























No. 640 Ring Seal Collar - fabricated from galvanized steel in diameters 4" - 16". Pocket of ring seal maintains full 1½" insulation thickness. Fabricated with 1/4" long tabs for easy installation.




MODEL No. 640-FL Ring Seal Collar For 1½" Duct Board
























No. 644-FL Ring Seal Collar w/ Damper - fabricated 


from galvanized steel in diameters 4" - 16". Pocket of ring 


seal maintains full 1½" insulation thickness. Fabricated 


with ½" long tabs for easy installation and manual damper 


with locking handle.







MODEL No. 650 Ring Seal Collar For Sheet Metal Duct





No. 650 Ring Seal Collar - fabricated from galvanized 


steel in diameters 4" - 16". Pocket of ring seal maintains


full 1½" insulation thickness.








MODEL No. 652 Ring Seal Collar w/ Scoop
For Sheet Metal Duct



No. 652 Ring Seal Collar w/ Scoop - fabricated from
galvanized steel in diameters 4" - 16". Pocket of ring seal
maintains full 1½" insulation thickness.

MODEL No. 654 Ring Seal Collar w/ Damper
For Sheet Metal Duct



No. 654 Ring Seal Collar w/ Damper - fabricated from
galvanized steel in diameters 4" - 16". Pocket of ring seal
maintains full 1½" insulation thickness. Manual damper
with locking handle.

MODEL No. 656 Ring Seal Collar with Scoop & Damper for Sheet Metal Duct

□
□
□
□ □
width="300" align="right" alt=""/>□

□
□
□
□
□ No. 656 Ring Seal Collar w/ Scoop & Damper - □
□
□
□ fabricated from galvanized steel in diameters 4" - 16".□
□
□
□ Pocket of ring seal maintains full 1½" insulation thickness. □
□
□
□ Manual damper with locking handle.□
□
□
□
□
□
□
□


MODEL No. 666 Adapter

□
□
□
□ □
width="300" align="right" alt=""/>□

□
□
□
□ No. 666 Adapter - fabricated from galvanized steel. □
□
□
□ Rectangular end oversized 3/16"; round collar □
□
□
□ undersized 1/8". Rectangular body 3" tall, round collar□
□
□
□ 3" long with bead.□
□
□
□
□
□

□
□

MODEL No. 680 Flex Duct Connector □□□ Sleeve

□
□
□
□ □
□

□
□
□
□ No. 680 Flex Duct Connector Sleeve - fabricated □

□
□
□ from 30ga. galvanized steel in diameters 4" - 20". □

□
□
□ Sleeve is 6" long with convex beads both ends.□

□
□
□

MODEL No. 695 Saddle Hanger for Duct Board




□
□
□
□ □
□

□
□
□
□ No. 695 Saddle Hanger for Duct Board - fabricated □


□
□
□ from 22ga. galvanized steel. Size: 4" wide, 2" x 2" angle. □





MODEL No. 697 Duct Board Hanger Channel




No. 697 Duct Board Hanger Channel - fabricated from

galvanized steel. Size: 1" x 2" x 1", 10 ft. lengths. 
Packaged in 100 ft. bundles.










MODEL No. 700-350 Dryerbox for 2x4 wall





No. 700-350 Dryer Box - fabricated from 22ga. aluminized

steel. One piece die-stamped construction. 3½" deep for

use in 2 x 4 stud wall. Accepts 4" snaplock pipe for venting

to exterior wall, roof or floor.

MODEL No. 700-425 Dryerbox for 2x6 wall














No. 700-425 Dryer Box - fabricated from 22ga. aluminized


steel. One piece die-stamped construction. 4¼" deep for


use in 2 x 6 stud wall. Accepts 4" snaplock pipe for venting


to exterior wall, roof or floor.

MODEL No. 710 Takeoff Collar For Sheet Metal Duct










No. 710 Takeoff Collar - fabricated from galvanized

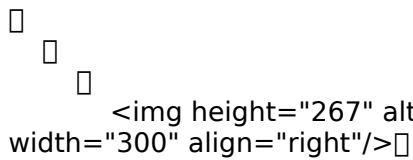
steel in diameters 4" - 16". 1" flange with Therma Seal


Gasket and pre-drilled screw holes for easy installation.

MODEL No. 712 Takeoff Collar w/ Scoop

For Sheet Metal Duct



No. 712 Takeoff Collar w/ Scoop - fabricated from

galvanized steel in diameters 4" - 16". 1" flange with

Therma Seal Gasket and pre-drilled screw holes for easy

Installation.

MODEL No. 714 Takeoff Collar w/ Damper

For Sheet Metal Duct




No. 714 Takeoff Collar w/ Damper - fabricated from

galvanized steel in diameters 4" - 16". 1" flange with

Therma Seal Gasket and pre-drilled screw holes for easy

Installation. Manual damper with locking handle.

MODEL No. 716 Collar with Scoop & Damper, Therma Seal Gasket



No. 716 Takeoff Collar w/ Scoop & Damper - fabricated from galvanized steel in diameters 4" - 16". 1" flange with Therma Seal Gasket and pre-drilled screw holes for easy installation. Manual damper with locking handle.

MODEL No. 720 Spin-In Collar For Sheet Metal Duct



No. 720 Spin-In Collar - fabricated from galvanized steel in diameters 4" - 16". 5½" long collar with crimp and bead.

MODEL No. 726 Spin-In Collar w/ Scoop & Damper For Sheet Metal Duct



No. 726 Spin-In Collar w/ Scoop & Damper - fabricated

from galvanized steel in diameters 4" - 16". 5½" long collar

with crimp & bead. Manual damper with locking handle.

MODEL No. 750 Drain Pan
















No. 750 Drain Pan - fabricated from galvanized steel.

¾" female drain installed in center of short side. All corners

sealed with silicone sealant. ½" hem on all edges.















MODEL No. 777 Aluminum Hanger Strap, 1"x200' Roll

``

No. 777 Aluminum Hanger Strap - fabricated from
.019" thick aluminum. 1" wide strap supplied in 200 ft.
rolls.

MODEL No. 778 Aluminum Hanger Strap, 1"x 100' Roll


``

No. 778 Aluminum Hanger Strap - fabricated from
.019" thick aluminum. 1" wide strap supplied in 100 ft.
rolls.

MODEL No. 792 Tying Wire

Supplied 10 ft. lengths; 250 ft. per bundle. Available in various widths and gauges.

MODEL No. 797 2" Duct Hanger Strap,100' Roll



No. 797 Hanger Strap - fabricated from galvanized steel.

1" wide strap; 100 ft. roll. Available in 26ga. and 22ga.


MODEL No. 799 2" Duct Hanger Strap, 100' Roll



No. 799 Hanger Strap - fabricated from galvanized steel.

2" wide strap; 100 ft. roll. Available in 28ga, 26ga. and 24ga.

MODEL No. 88 Duct Board Box w/o Flange




No. 88 Duct Board Box w/o Flange - fabricated from

30ga. galvanized steel and 1½" thick duct board; R-6.

Black interior with ½" drywall flange.

MODEL No. 900 Return Air Box, 6" Deep



No. 900 Return Air Box - fabricated from 28ga. galvanized

steel. ½" flange on rectangular end with lay-in filter rack for

1" thick filter.

□

MODEL No. 905 Return Air Box, 10" Deep

□

□

□

``□

□

□

□

□

No. 905 Return Air Box - fabricated from 28ga. galvanized□

□

□

steel. ½" flange on rectangular end with lay-in filter rack for□

□

□

1" thick filter.□

□

□

□

□

□

□

MODEL No. 910 Return Air Box, 22" Deep

□

□

□

``□

□

□

□

□

No. 910 Return Air Box - fabricated from 28ga. galvanized□

□

□

steel. ½" flange on rectangular end with diagonal filter rack □

□

□

for 1" thick filter.□

□

□

□

□

□

□

MODEL No. 912 Return Air Box, 22" Deep

□
□
□
□ □
width="300" align="right" alt=""/>□

□
□
□
□
□ No. 912 Return Air Box - fabricated from 28ga. galvanized□
□
□ steel. ½" flange on rectangular end with diagonal filter rack □
□
□ for 1" thick filter. Internally insulated with ½" thick insulation.□

MODEL No. 920 Supply Connector

□
□
□
□ □
width="300" align="right" alt=""/>□

□
□
□
□ No. 920 Supply Connector - fabricated from 28gauge□
□
□ galvanized steel in diameters 8" - 12". Aluminum butterfly□
□
□ damper installed with ¾" dovetail tabs to secure to trunk □
□
□ duct.□

No. 935 Damper Section - fabricated from 26 gauge
galvanized steel with 1" flange. Standard size: 15" x 15³/₄,
4" deep. Top is removable to be used flat.

MODEL No. 945 Disposable Filter



No. 945 Disposable Filter - 1" thick.

Available Sizes:	10" x 20"	12" x 20"	
		14" x 20"	16" x 20"
		20" x 20"	20" x 25"

MODEL No. 950 Floor Grille

 ``












































No. 950 Floor Grille - Available Sizes: 12" x 20"
14" x
14" x
16" x

MODEL No. 965 Wye




``


No. 965 Wye - fabricated from galvanized steel. All collars
fabricated with crimp and bead. Available in various gauges
and sizes.

MODEL No. 967 Wye with Back Draft Damper

□
□
□
□ □
width="300" align="right" alt=""/>□

□
□
□
□ No. 967 Wye - fabricated from galvanized steel. All collars□
□
□ fabricated with crimp and bead. Available in various gauges□
□
□ and sizes. Back draft damper installed in large end.□
□

MODEL No.175 Round Damper Sleeve

□
□
□
□ □
width="300" align="right"/>□

□
□
□
□ No. 175 Round Damper Sleeve - fabricated from □
□
□ galvanized steel in diameters 4" - 18". Continuous weld□
□
□ longitudinal seam. Manual damper with locking handle.□
□

MODEL No.271 Tee

□
□

□
□ □
□
□
□
□ No. 271 Tee - fabricated from galvanized□
□
□ steel in diameters 3" - 24". Tees are available□
□
□ in U.S. gauges 30ga. - 24ga. Also available□
□
□ in aluminum & stainless steel.□
□
□
□
□
□
□
□

MODEL No.356 Aluminum Vent Cap with Screen


□
□
□
□ □
□
□
□
□ No. 365 Aluminum Vent Cap with Screen - fabricated □
□
□ from .045" thick aluminum 1100. Screen installed in collar.□
□
□
□
□
□
□
□

MODEL No.370 Aluminum Flashing

□
□
□
□ □

No. 370 Aluminum Flashing - fabricated from .045" thick aluminum 1100.

MODEL No.500 Adjustable Return Air Stand with Filter Rack



No. 500 Adjustable Return Air Stand - fabricated from 18ga. galvanized steel. Adjustable to fit most 1½ to 3 ton air handlers. Built-in filter rack for 1" thick filter. Spot welded seam construction.

MODEL No.550 Condensing Unit Cover



No. 550 Condensing Unit Cover - fabricated from 24ga. galvanized steel with ¾" #16 expanded metal in both ends. 1" flange on bottom.

MODEL No.560 Line Cover



No. 560 Line Cover - fabricated from galvanized steel. Available in 8 ft. and 10 ft. lengths. Fabricated with 1" flange with hemmed edge. Available in 28 and 26 gauge.

MODEL No.565 Line Cover with Cap



No. 565 Line Cover w/ Cap - fabricated from galvanized

steel. Available in 8 ft. and 10 ft. lengths. Fabricated with 1" flange with hemmed edge. Available in 28 and 26 gauge. Cap installed on one end of cover.

No. 261-D Tab Collar w/ Damper For Sheet Metal Duct



No. 261-D Tab Collar w/ Damper - fabricated from 30ga .galvanized steel in diameters 4" - 20". 6" long collar with 1/2" long tabs for easy installation. Manual damper with locking handle.

Snaplock Pipe & Elbows

There are no articles in this category.

Aluminum Flexible Pipe

There are no articles in this category.

Tees, Wyes & Reducers

There are no articles in this category.

Takeoffs

There are no articles in this category.

Starting Collars for 1" & 1-1/2" Duct Board

There are no articles in this category.

Flex Duct Air Distribution Fittings

There are no articles in this category.

Starting Collars for Sheet Metal Duct

There are no articles in this category.

Register Boots and Boxes

There are no articles in this category.

Insulated Register Boots & Boxes, R-4

There are no articles in this category.

Ceiling Radiation Damper Boxes

There are no articles in this category.

Vent Tops & Flashing

There are no articles in this category.

Installation Accessories

There are no articles in this category.

Duct Hangers & Mounting Brackets

There are no articles in this category.

Mobile Home Duct & Fittings

There are no articles in this category.

Wallstack & Fittings

There are no articles in this category.

Insulated Register Boots & Boxes, R-6

There are no articles in this category.