



6390 Phillips Highway
Jacksonville, FL 32216
Phone (904) 737-7144

SPECIFICATION DATA SHEET

MODEL No. 107

ALUMINUM FLEXIBLE PIPE

Date: 01/19/06

Drawn by: Don. JR.

DIMENSIONAL DATA

SIZES: 3" THROUGH 8" DIAMETER
8 FT. SECTIONS COMPRESSED TO 38"

FABRICATION DATA


CONSTRUCTION:
.005" THICK ALUMINUM, ALLOY 1100
TRIPLE LOCK SEAM.

RECOMMENDED BEND RADIUS:
1-1/2 X DIAMETER TO CENTER LINE OF DUCT.

TEMPERATURE RANGE:
-60 DEG. F. TO +600 DEG. F.

MAXIMUM OPERATING PRESSURE:
10" W.C. POSITIVE & 12" W.C. NEGATIVE; 5500 FPM

FEATURES

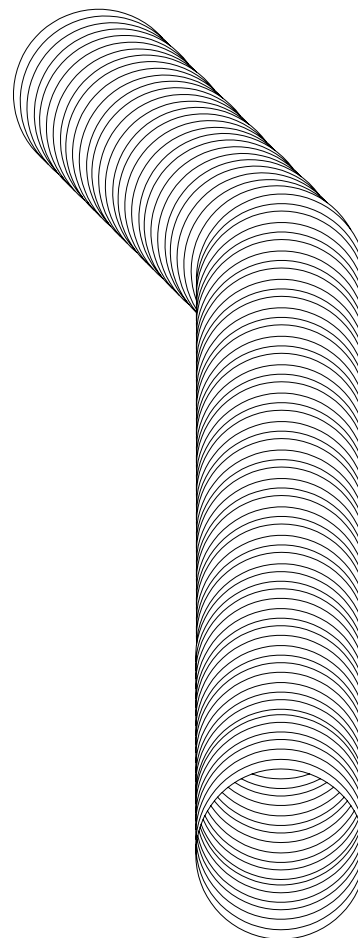

OPTIONS

NO.105 FLEXELL PIPE: 8FT. SECTIONS
LISTED UL 181: CLASS 0 AIR DUCT, MEETS
REQUIREMENTS - NFPA BULLETIN 90-A.

SPECIAL NOTES

**NOT RECOMMENDED FOR RANGE HOOD DUCT.
COMPRESSED ALUMINUM PIPE IS NOT COVERED BY THE U.L. 181 TEST PROCEDURE.**