

DIMENSIONAL DATA

4-1/2" HIGH FRAMED BOX
 OUTER BOX DIMENSION IS 3" GREATER THAN REGISTER DIMENSION.

FABRICATION DATA

WRAPPER FABRICATED FROM 30 GAUGE GALVANIZED STEEL.
 DUCT BOARD TOP.

FEATURES

R-6 INSULATION.
 SOLID CORNERS WITH HANGER HOLES.
 1/2" DRYWALL FLANGE.
 HOLE CLUSTER FOR REGISTER ATTACHMENT.
 DUCT BOARD TOP ALLOWS FOR VARIOUS COLLAR INLET SIZES.
 BLACK INTERIOR.
 GASKET AROUND REGISTER OPENING SEALS BOX WHERE IT PENETRATES BUILDING ENVELOPE.

OPTIONS

No. 1288-FL DUCT BOARD BOX, R-6.0 INSULATION, BLACK INTERIOR.


SPECIFICATION DATA SHEET

Date: 04/14/04

Drawn by: M.D.C.

MODEL No. 1288-FLG

DUCT BOARD BOX, R-6.0
 WITH THERMA SEAL GASKET

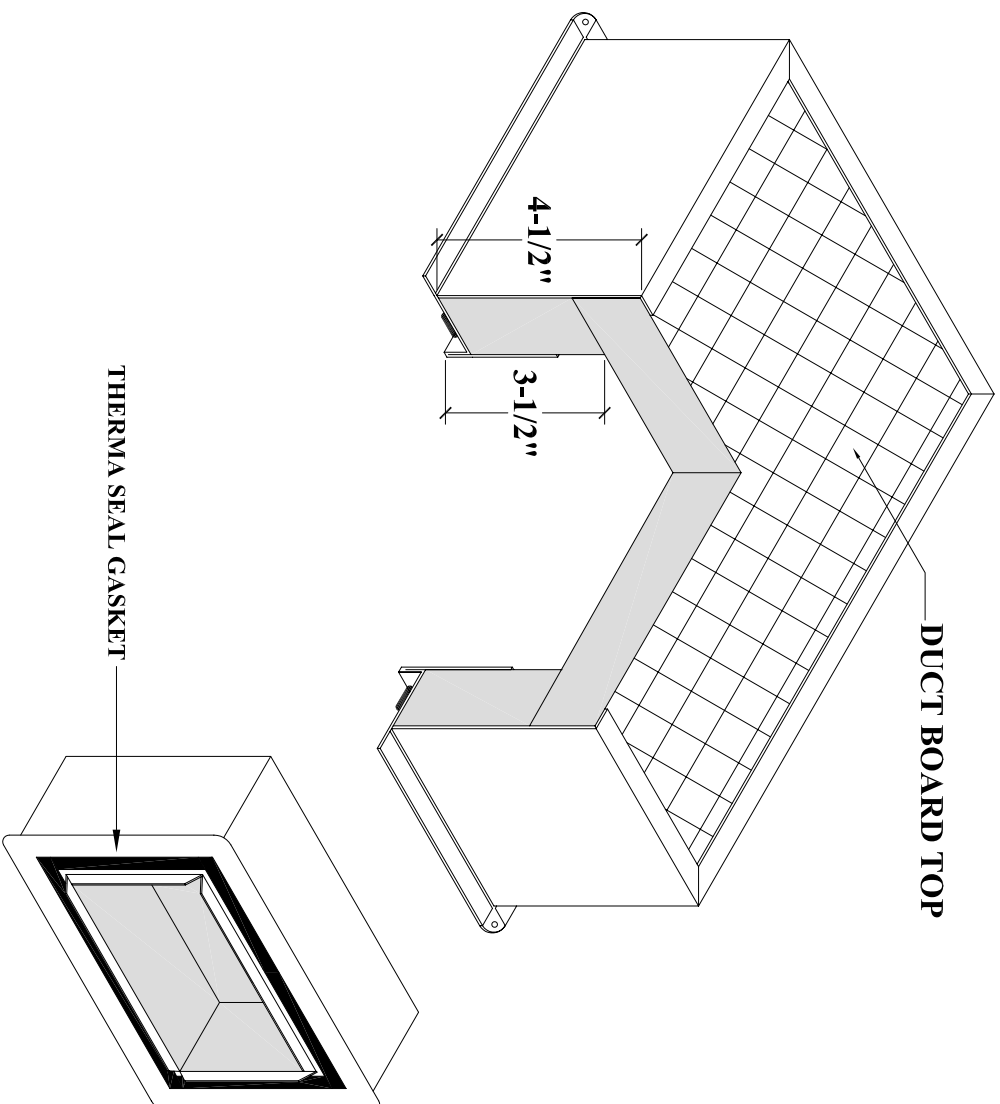

SPECIAL NOTES

GASKET TESTED TO ASTM E-84-91. FLAME SPREAD LESS THAN 25, SMOKE DENSITY LESS THAN 50. INTERNAL INSULATION USED MEETS THE REQUIREMENTS OF ASTM C 1338 (FORMERLY ASTM C 665) STANDARD TEST FOR FUNGI RESISTANCE.