



6390 Phillips Highway
Jacksonville, FL 32216
Phone (904) 737-7144

SPECIFICATION DATA SHEET

MODEL No. 401

STRAIGHT DUCT

Date: 09/12/07 rev.

Drawn by: B.H.C.

DIMENSIONAL DATA

BUILT TO DESIGN SPECIFICATIONS.
AVAILABLE IN 3FT., 4FT., & 5FT. LENGTHS.

FABRICATION DATA

MATERIAL:
FABRICATED FROM HOT-DIPPED GALVANIZED
STEEL SHEET OF LOCK FORMING QUALITY
PER ASTM A653 CS TYPE B.

GAUGES AVAILABLE:
28, 26, 24, 22, 20 AND 18 GAUGE.

BUTTON PUNCH SNAP-LOCK LONGITUDINAL
SEAM IS STANDARD.

AVAILABLE WITH PITTSBURGH LOCK
LONGITUDINAL SEAM.

TRANSVERSE BEADS SPACED ON 12" CENTERS.


FEATURES

INTERNAL INSULATION AVAILABLE:
1/2", 1" OR 1-1/2" THICK.

SHIPPED IN L-SECTIONS, READY FOR ASSEMBLY.

TRANSVERSE CONNECTIONS

ENDS STRAIGHT
FLANGES TURNED IN OR OUT
S-LOCK AND DRIVE
FLANGED BOLT TOGETHER

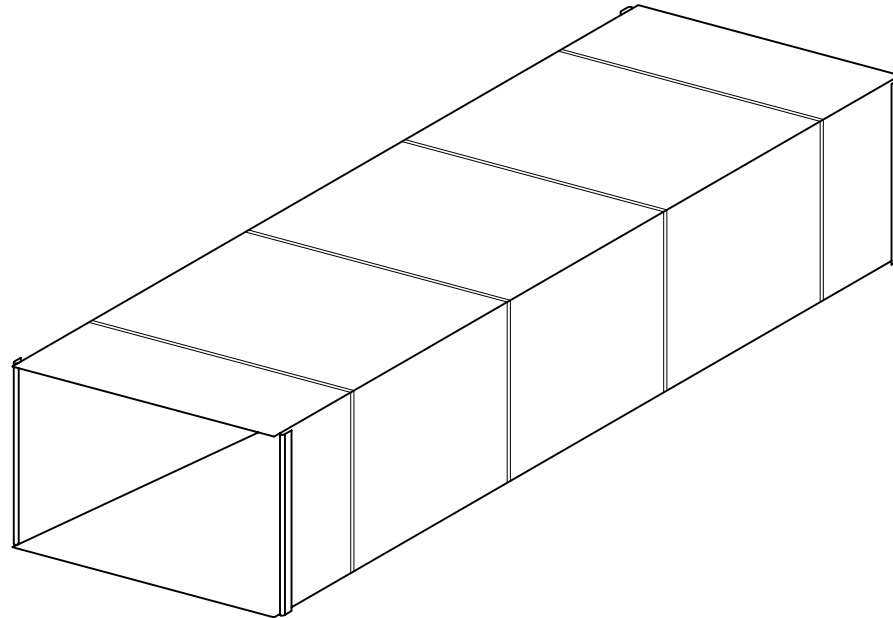

SPECIAL NOTES

AVAILABLE UPON REQUEST:

- 1) FABRICATED FROM .018" THICK (26 GA.) STAINLESS STEEL TYPE 304-2B (4 FT. JOINTS ONLY)
- 2) FABRICATED FROM .025" THICK OR .032" THICK ALUMINUM SHEET 3003 H-14 ALLOY (4 FT. JOINTS ONLY)